


Diethard Thieme
Übungen
zur
Baustatik
BS 10

DIE AUFGABEN IN BSO3 GERECHNET ?

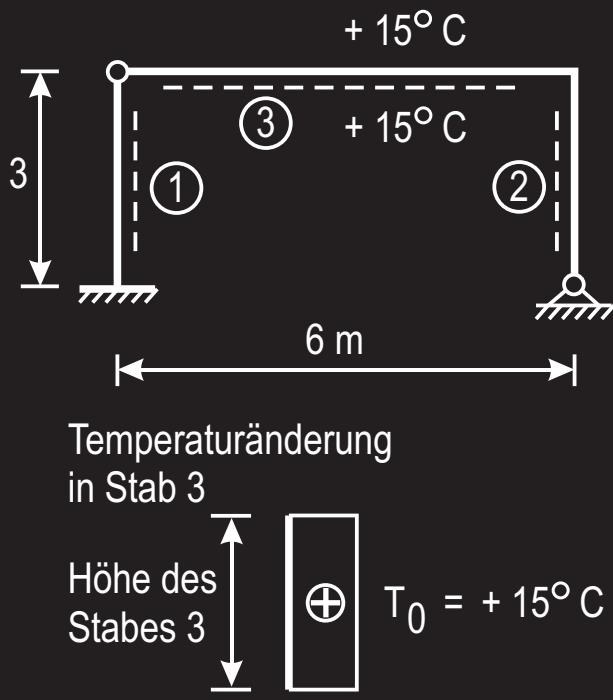

Kennwerte

$$J_3 = 300\,000 \text{ cm}^4 ; J_1 = J_2 = 0,9 J_3$$

$$E_1 = E_2 = E_3 = 3 \cdot 10^7 \text{ kN/m}^2$$

Gleichmäßige Erwärmung des Stabes 3

$$T_0 = +15^\circ\text{C}$$

$$\alpha_t = 1,2 \cdot 10^{-5} \text{ Grad}^{-1}$$

$$\text{Gewählt: } J_0 = J_1 ; E_0 = E_1$$


$$E_0 J_0 \alpha_t = 0,972 \text{ kN} \cdot \text{m}^2 \cdot \text{Grad}^{-1}$$

Reduzierte Stablängen

$$L'_1 = L'_2 = 3 \frac{1}{1} \frac{1}{1} = 3 \text{ m}$$

$$L'_3 = 6 \frac{1}{1} \frac{0,9}{1} = 5,4 \text{ m}$$

$$L_3^{(4)} = L_3 E_0 J_0 \alpha_t = 5,832 \text{ kN} \cdot \text{m}^3 \cdot \text{Grad}^{-1}$$

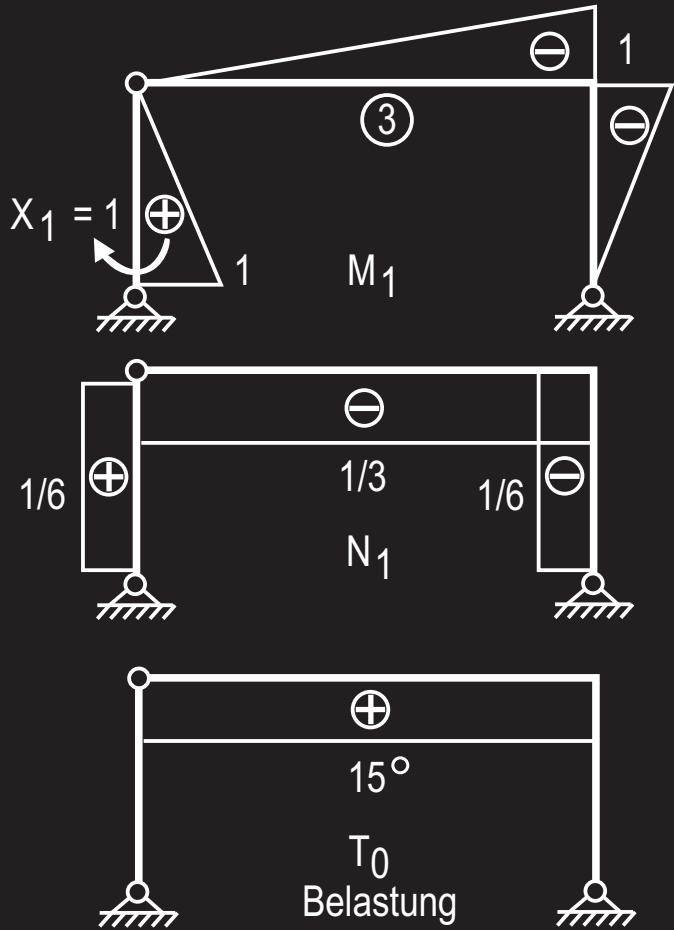

$$L'_1 = L'_2 = 3 ; L'_3 = 5,4 ; L_3^{(4)} = 5,832$$

$$a = E_0 J_0 1^* \delta$$

Belastungszahl

$$a_{10} = 5,832 (+15) \left(-\frac{1}{3}\right) = -29,2$$


aus T_0 und N_1 in Stab 3


Vorzahl

$$a_{11} = 3 \frac{1}{3} 1^2 + 3 \frac{1}{3} (-1)^2 + \\ + 5,4 \frac{1}{3} (-1)^2 = 3,8$$


Gleichung

$$a_{11} X_1 = -a_{10} \text{ daraus } X_1 = 7,68$$

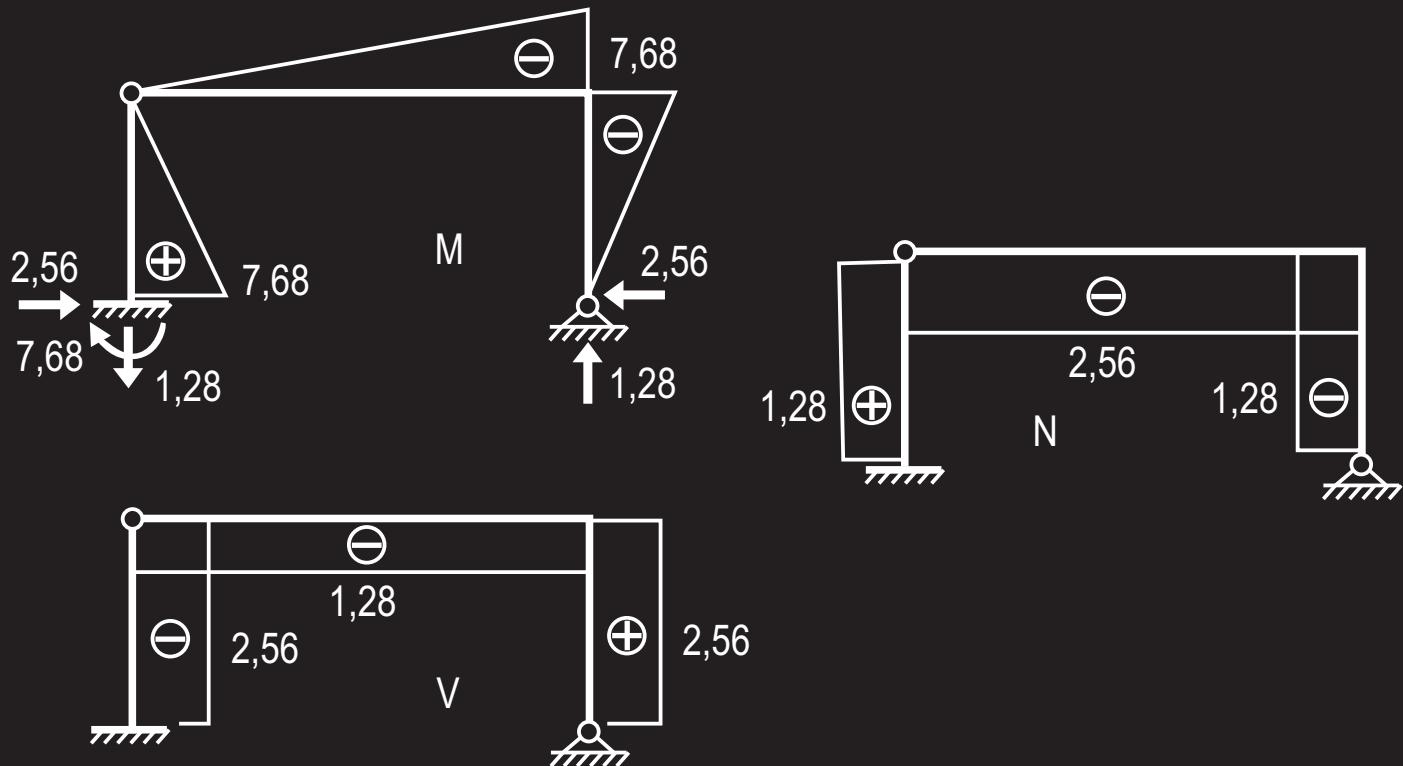

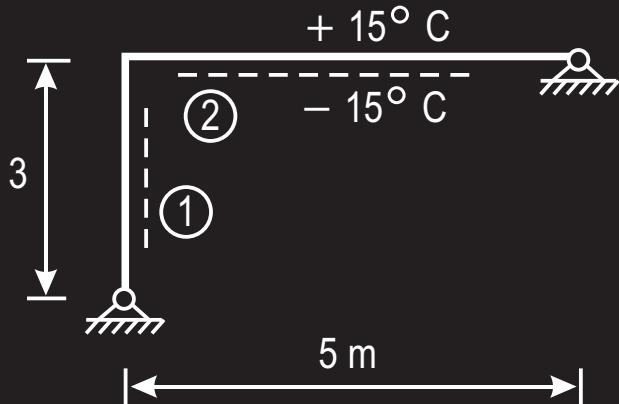

Temperaturänderung im Stab 2

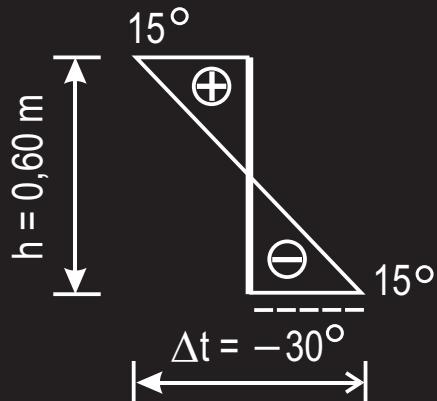

Kennwerte

$$J_1 = 600\,000 \text{ cm}^4 ; J_2 = 1,2 J_1$$

$$E_1 = E_2 = 3 \cdot 10^7 \text{ kN/m}^2$$

Querschnitt des Stabes 2 : 40/60 cm

Temperaturänderung im Stab 2

Erwärmung außen um +15°C

Abkühlung innen um -15°C

$$\alpha_t = 1,2 \cdot 10^{-5} \text{ Grad}^{-1}$$


Gewählt: $J_0 = J_1 ; E_0 = E_1$

$$E_0 J_0 \alpha_t = 2,16 \text{ kN} \cdot \text{m}^2 \cdot \text{Grad}^{-1}$$

Reduzierte Stablängen

$$L'_1 = 3 \text{ m} ; L'_2 = 4,17 \text{ m}$$

$$L_2^{(4)} = L_2 E_0 J_0 \alpha_t = 10,6 \text{ kN} \cdot \text{m}^3 \cdot \text{Grad}^{-1}$$

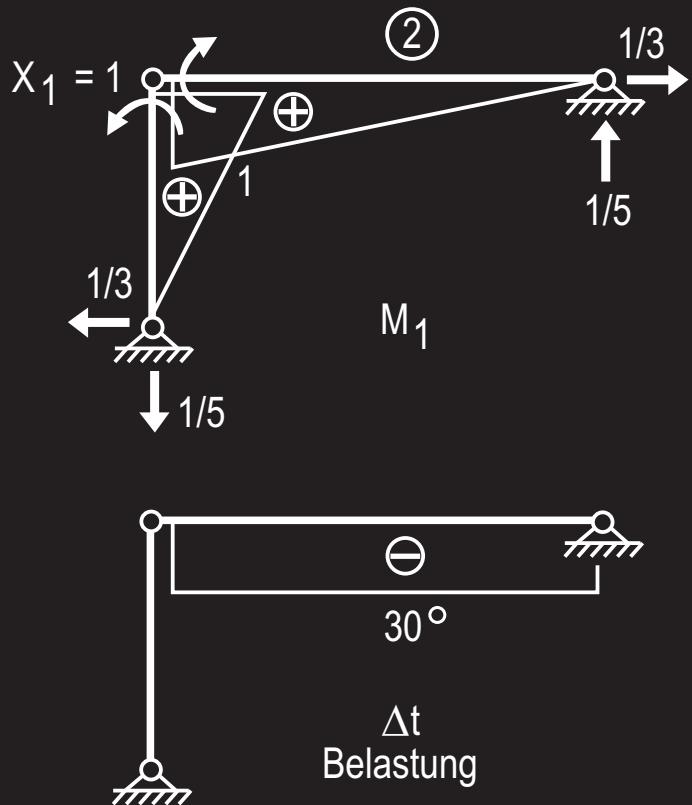

$$L'_1 = 3 ; L'_2 = 4,17 ; L^{(4)}_2 = 10,8$$

$$a = E_0 J_0 1^* \delta$$

Belastungszahl

$$a_{10} = 10,8 \frac{1}{2} 1 \left(\frac{-30}{0,6} \right) = -270$$

aus Δt und M_1 in Stab 2




Vorzahl



$$a_{11} = 3 \frac{1}{3} 1^2 + 4,17 \frac{1}{3} 1^2 = 2,39$$

Gleichung

$$a_{11} X_1 = -a_{10} \text{ daraus } X_1 = 113$$



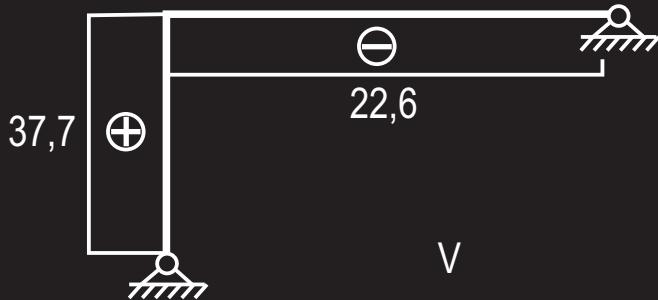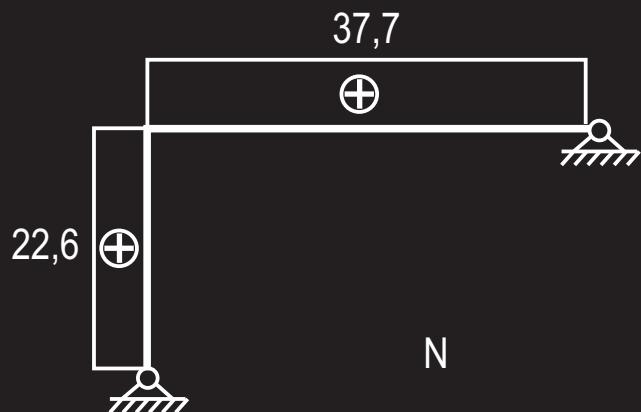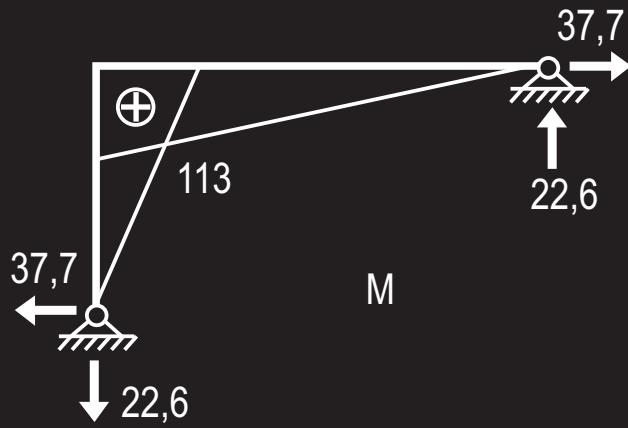

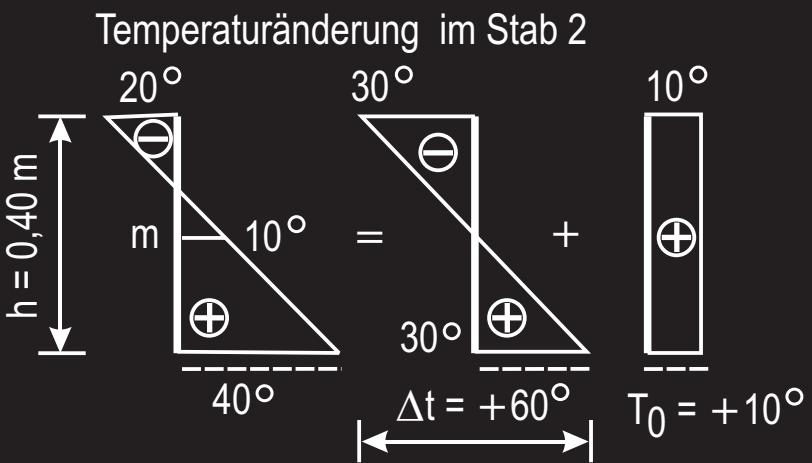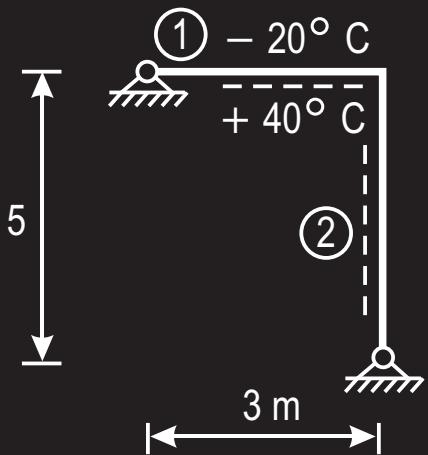

Kennwerte

$$J_2 = 102\,400 \text{ cm}^4 ; J_1 = 1,25 J_2$$

$$E_1 = E_2 = 2,1 \cdot 10^7 \text{ kN/m}^2$$

Stabhöhe des Stabes 2 : $h = 40 \text{ cm}$

Temperaturänderung im Stab 2

Abkühlung außen um -20°C

Erwärmung innen um $+40^\circ \text{C}$

$$\alpha_t = 1,2 \cdot 10^{-5} \text{ Grad}^{-1}$$


$$\text{Gewählt: } J_0 = J_1 ; E_0 = E_1$$

$$E_0 J_0 \alpha_t = 0,323 \text{ kN} \cdot \text{m}^2 \cdot \text{Grad}^{-1}$$

Reduzierte Stablängen

$$L'_1 = 5 \text{ m} ; L'_2 = 3,75 \text{ m}$$

$$L_2^{(4)} = 0,969 \text{ kN} \cdot \text{m}^3 \cdot \text{Grad}^{-1}$$

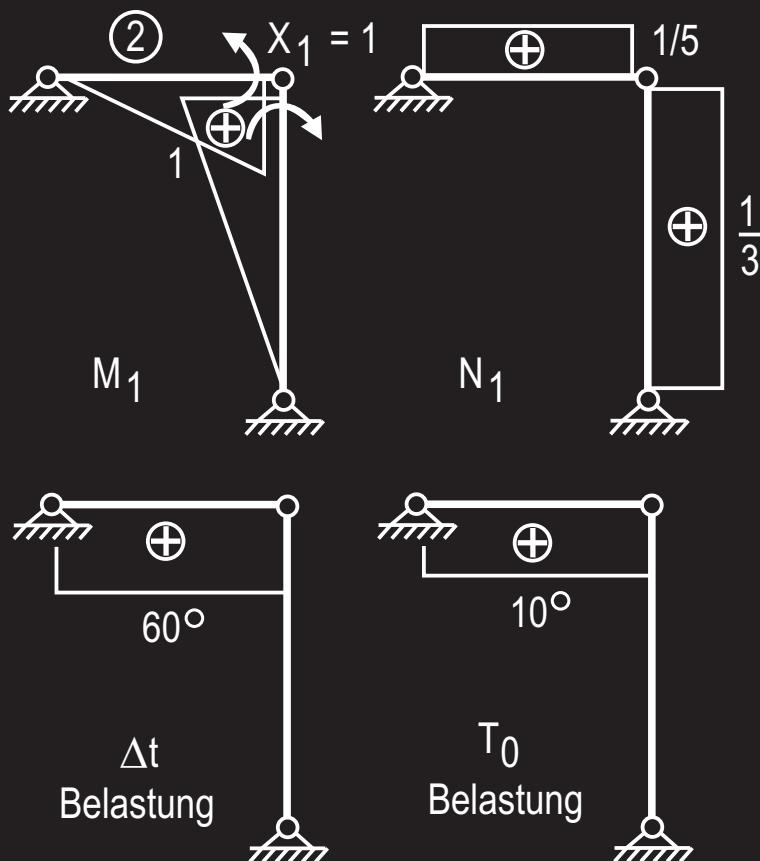

$$L'_1 = 5 ; L'_2 = 3,75 ; L^{(4)}_2 = 0,969$$

$$a = E_0 J_0 1^* \delta$$

Belastungszahl

$$a_{10} = 0,969 \frac{1}{2} 1 \frac{60}{0,40} +$$

aus Δt und M_1 in Stab 2

$$+ 0,969 \frac{1}{5} 10 = 74,6$$




aus T_0 und N_1 in Stab 2


Vorzahl

$$a_{11} = 5 \frac{1}{3} 1^2 + 3,75 \frac{1}{3} 1^2 = 2,92$$

Gleichung

$$a_{11} X_1 = -a_{10} \text{ daraus } X_1 = -25,6$$

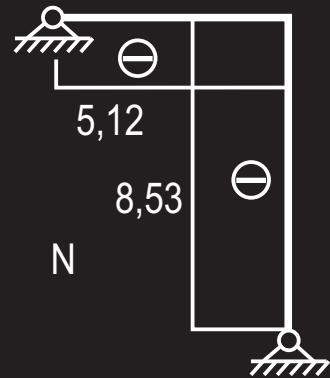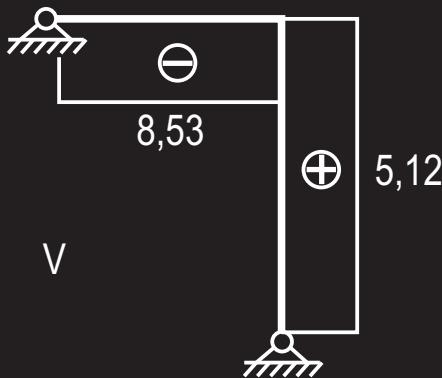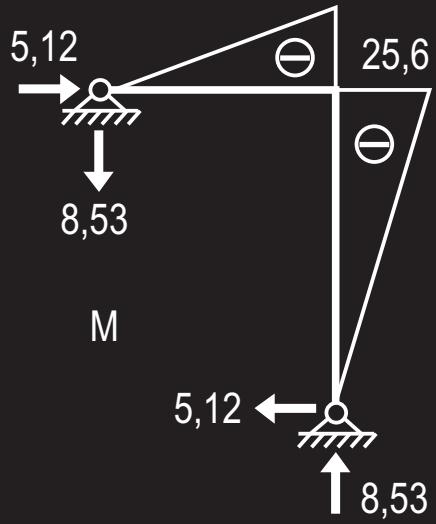

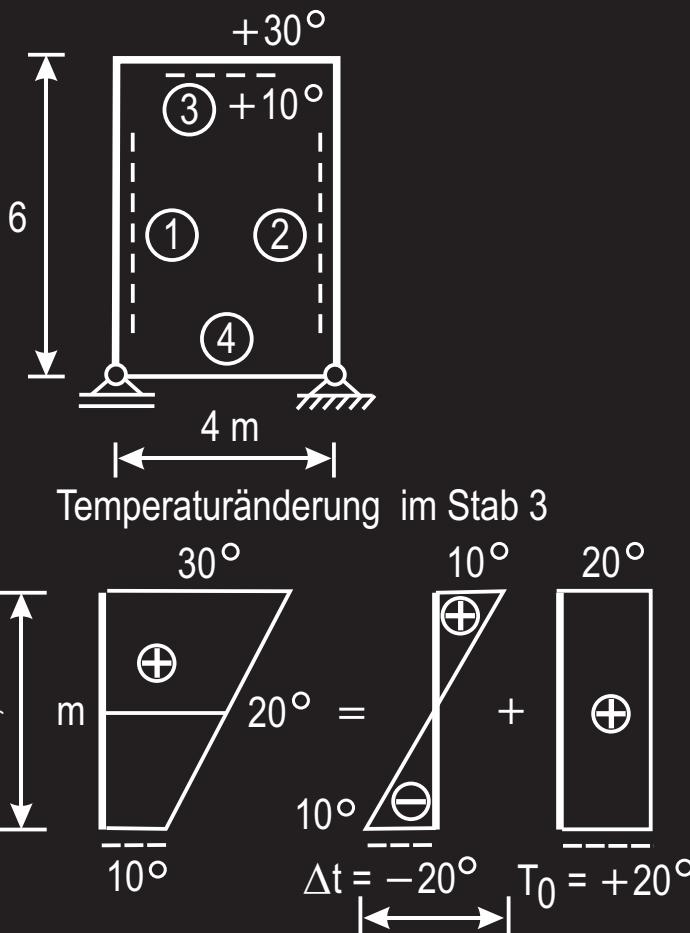

Kennwerte

$$J_3 = 1\,280\,000 \text{ cm}^4; J_1 = J_2 = 0,75 J_3$$

$$E_1 = E_2 = E_3 = 2,1 \cdot 10^7 \text{ kN/m}^2$$

$$E_4 = 2,1 \cdot 10^8 \text{ kN/m}^2; A_4 = 5 \text{ cm}^2$$

Querschnitt des Stabes 3 : 30/80 cm

Temperaturänderung im Stab 3

Erwärmung außen um $+30^\circ \text{ C}$

Erwärmung innen um $+10^\circ \text{ C}$

$$\alpha_t = 1,2 \cdot 10^{-5} \text{ Grad}^{-1}$$


$$\text{Gewählt: } J_0 = J_3; E_0 = E_1$$

$$E_0 J_0 \alpha_t = 3,226 \text{ kN} \cdot \text{m}^2 \cdot \text{Grad}^{-1}$$

Reduzierte Stablängen

$$L'_1 = L'_2 = 8 \text{ m}; L'_3 = 4 \text{ m}; L''_4 = 10,24 \text{ m}^3$$

$$L^{(4)}_4 = 12,9 \text{ kN} \cdot \text{m}^3 \cdot \text{Grad}^{-1}$$

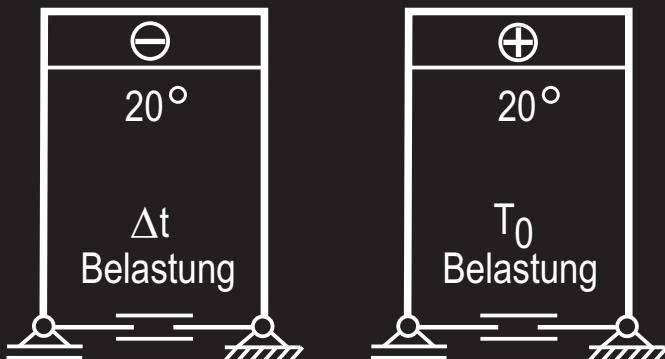

$$L'_1 = L'_2 = 8 ; \quad L'_3 = 4$$

$$L''_4 = 10,24 ; \quad L^{(4)}_3 = 12,9$$

$$a = E_0 J_0 1^* \delta$$

Belastungszahl

aus Δt

aus T_0

$$a_{10} = 12,9 \left[(-6) \left(\frac{-20}{0,8} \right) + (-1) 20 \right]$$


$$a_{10} = 1677$$



Vorzahl


$$a_{11} = 8 \frac{1}{3} (-6)^2 + 8 \frac{1}{3} (-6)^2 + \\ + 4 (-6)^2 + 10,24 \cdot 1^2 = 346,2$$

Gleichung aus N im Zugband

$$a_{11} X_1 = - a_{10} \text{ daraus } X_1 = -4,84$$

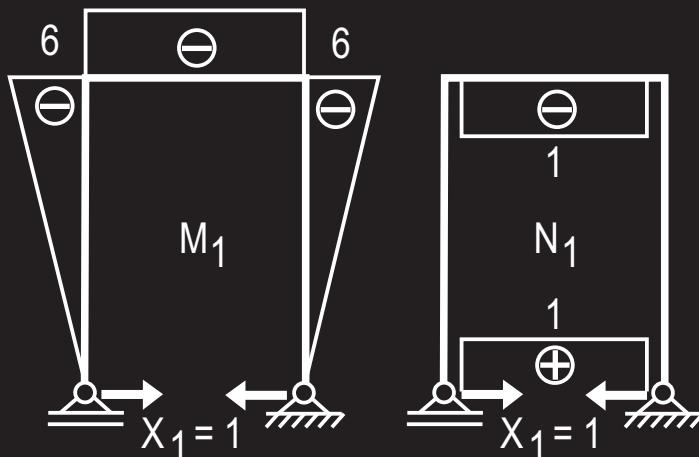

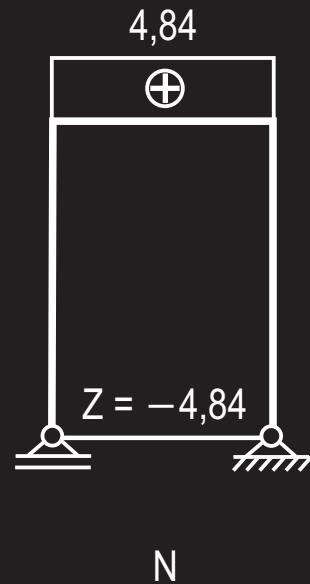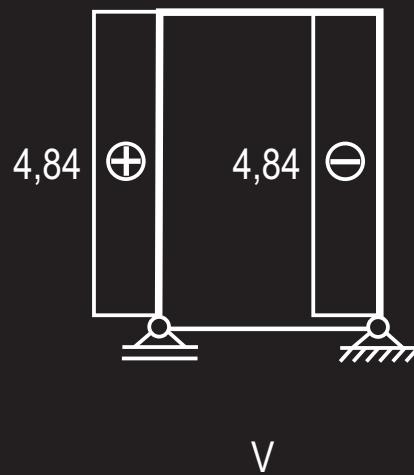

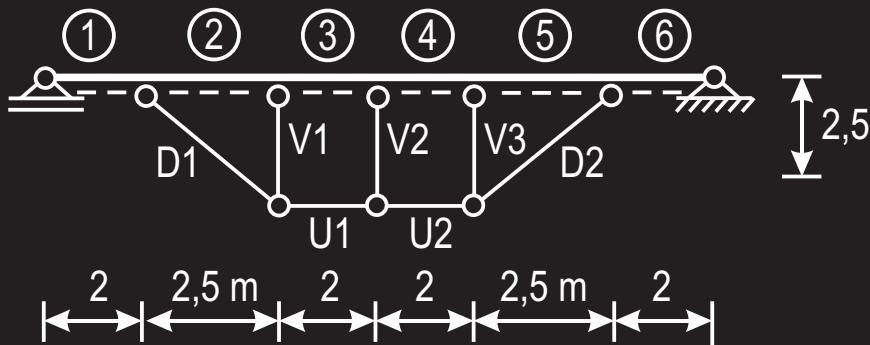

Biegesteife Stäbe 1 – 6

$$J_1 \dots J_6 = 29\,000 \text{ cm}^4$$

$$E_1 \dots E_6 = 2,1 \cdot 10^8 \text{ kN/m}^2$$


Höhe der Stäbe : $h = 40 \text{ cm}$


Fachwerkstäbe

$$A = 25 \text{ cm}^2$$

$$E = 2,1 \cdot 10^8 \text{ kN/m}^2$$

Temperaturänderung in den biegesteifen Stäben 1 – 6

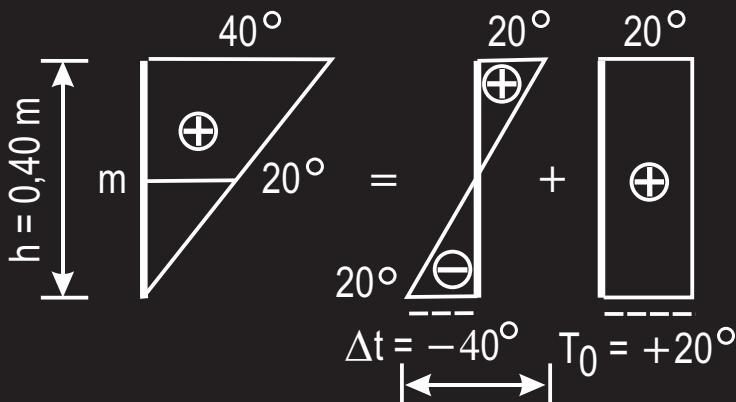

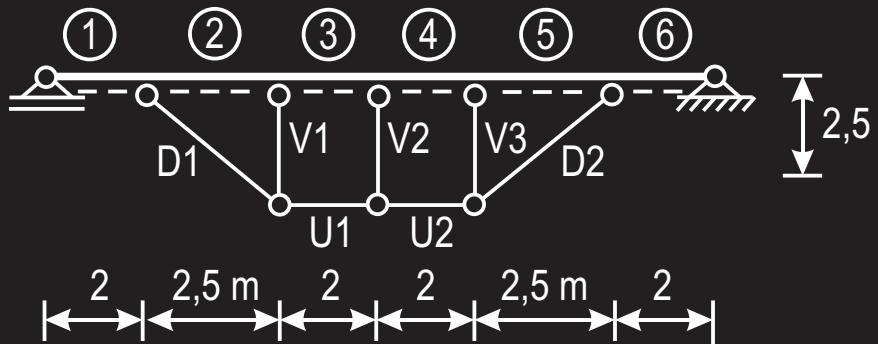

$$E_0 \cdot J_0 \cdot \alpha_t = 0,731 \text{ kN} \cdot \text{m}^2 \cdot \text{Grad}^{-1}$$

Reduzierte Stablängen



$$L'_1 = L'_3 = L'_4 = L'_6 = 2 \text{ m} \quad ; \quad L'_2 = L'_5 = 2,5 \text{ m}$$

$$L^{(4)}_1 = L^{(4)}_3 = L^{(4)}_4 = L^{(4)}_6 = 1,462 \text{ kN} \cdot \text{m}^3 \cdot \text{Grad}^{-1} \quad ; \quad L^{(4)}_2 = L^{(4)}_5 = 1,828 \text{ kN} \cdot \text{m}^3 \cdot \text{Grad}^{-1}$$

$$U_1, U_2 : L'' = 0,232 \text{ m}^3$$

$$V_1, V_2, V_3 : L'' = 0,290 \text{ m}^3$$

$$D_1, D_2 : L'' = 0,411 \text{ m}^3$$

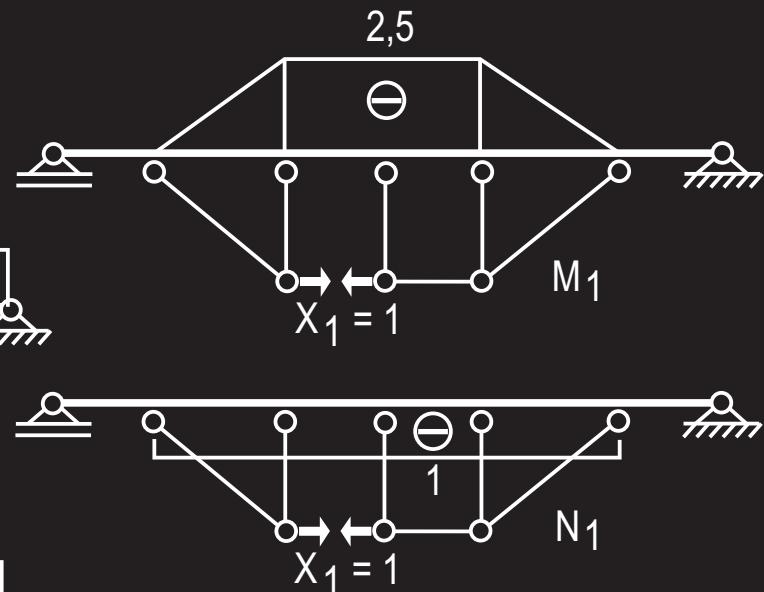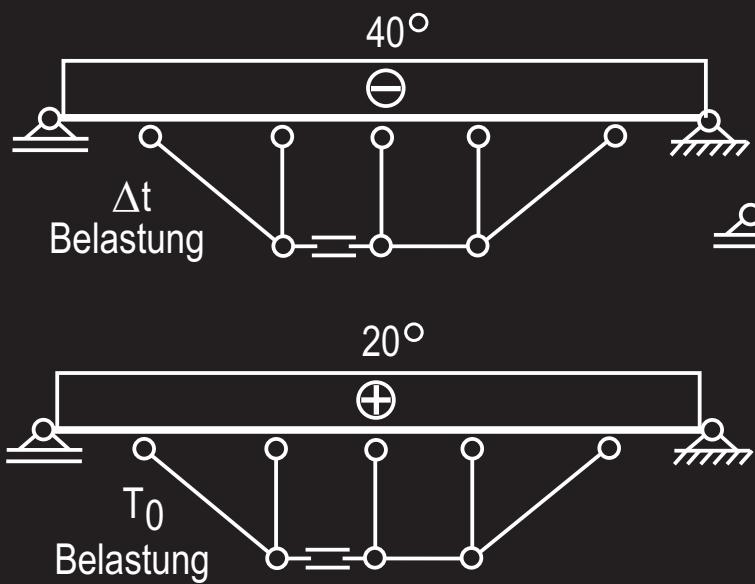

Stab	1	2	3
U	1	1	
V	-1	0	-1
D	1,414	1,414	

N_1

$$a = E_0 J_0 1^* \delta$$

Belastungszahl

aus Δt

aus T_0



$$\begin{aligned} a_{10} &= 2 \cdot 1,828 \left[\frac{1}{2} (-2,5) \left(\frac{-40}{0,4} \right) + (-1) 20 \right] \\ &\quad + 2 \cdot 1,462 \left[1 (-2,5) \left(\frac{-40}{0,4} \right) + (-1) 20 \right] = 1056,4 \end{aligned}$$

Vorzahl

$$\begin{aligned} a_{11} &= 2 \cdot 2,5 \frac{1}{3} (-2,5)^2 + 2 \cdot 2 (-2,5)^2 + \\ &\quad + 2 \cdot 0,232 \cdot 1^2 + 2 \cdot 0,290 (-1)^2 + 2 \cdot 0,411 \cdot 1,414^2 = 38,1 \end{aligned}$$

Gleichung

$$a_{11} X_1 = -a_{10} \text{ daraus } X_1 = -27,7$$

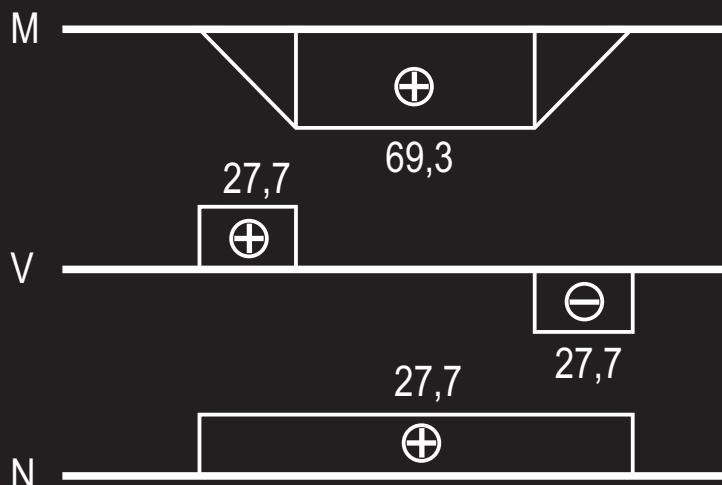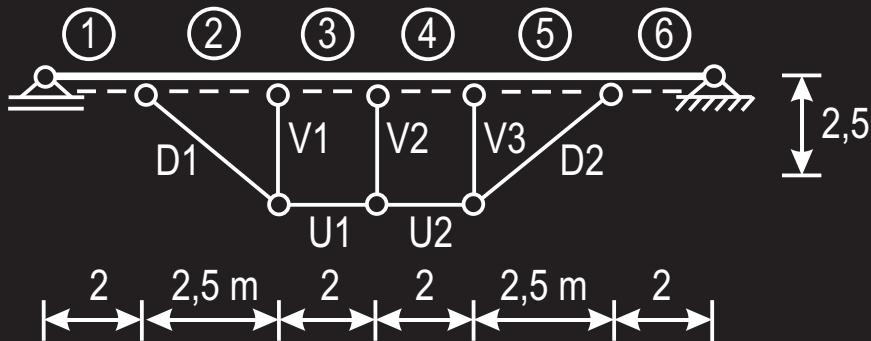

Stab	1	2	3
U	-27,7	-27,7	
V	27,7	0	27,7
D	-39,2	-39,2	